TYPICAL TEMPORARY METER ON A POLE

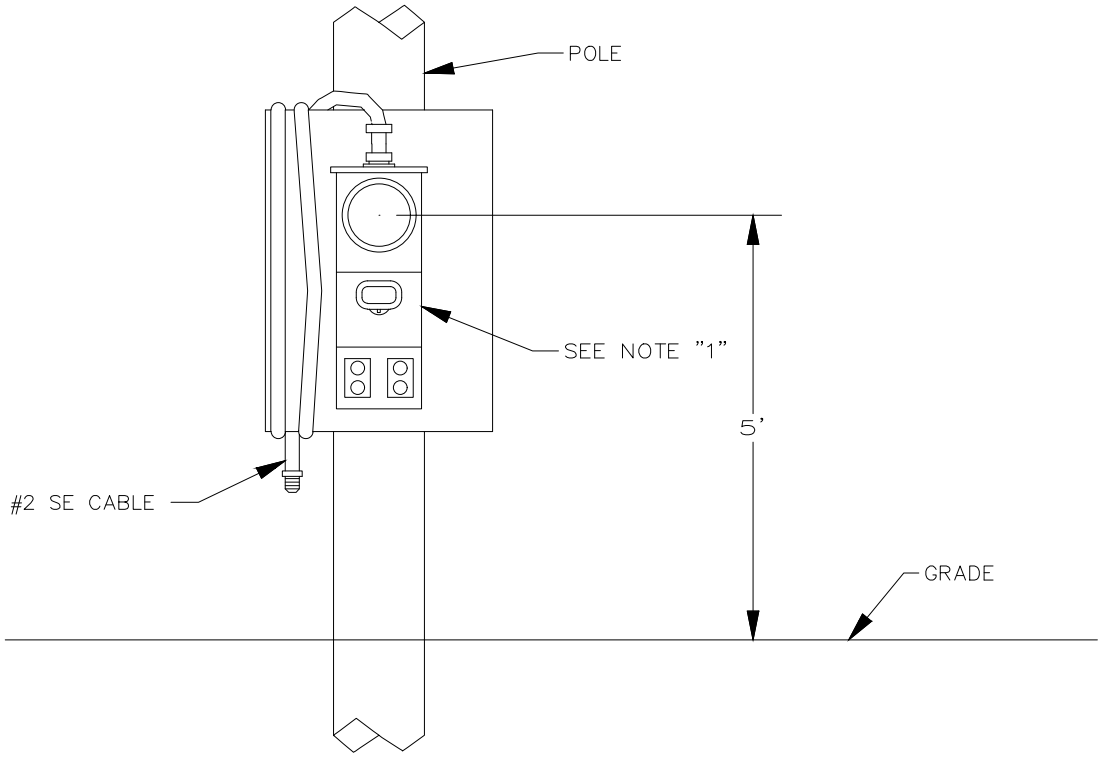

NOTES:

1. RAIN TIGHT SERVICE EQUIPMENT WITH GROUND FAULT PROTECTION AND PROVISION FOR LOCKING SHALL BE USED AS PER NATIONAL ELECTRICAL CODE (NEC).
2. INSTALLATION AND REMOVAL OF THE SE CABLE TO THE POLE ABOVE THE LEVEL OF THE METER SOCKET MUST BE DONE BY THE UTILITY. INSTALLATION ON THE STRUCTURES OR OTHER TYPE OF CONSTRUCTION OTHER THAN ABOVE, MAY BE PERMITTED ONLY WITH ADVANCE APPROVAL OF UTILITY.
3. WHERE SUBJECT TO STATE OR LOCAL ELECTRICAL INSPECTION, SUCH INSPECTION MUST BE MADE PRIOR TO ENERGIZING.
4. CHECK WITH VEC ON COST, THE MEMBER WILL SUPPLY TEMPORARY CONNECTION.
5. TEMPORARY SERVICE IS LIMITED TO A SIX (6) MONTH TIME PERIOD UNLESS EXTENSION IS APPROVED BY VEC.
6. THE SEU CABLE'S LENGTH SHALL BE SUFFICIENT TO REACH JUST ABOVE THE NEUTRAL/SECONDARY.
7. VEC WILL GROUND THE METER SOCKET

REV	DATE	REVISION DESCRIPTION	DRN	CKD

VERMONT ELECTRIC COOPERATIVE INC.

JOHNSON, VT

TYPICAL TEMPORARY SERVICE - POLE

DES: | DRN: CB

CKD: | SCALE: NONE

DATE: 07/10/2017

DWG. NO. 303 Page 1

REV 1